



AUTOMATIC COVER




HYDROMASSAGE SYSTEM



ANTI SLIPPERY COMFORTABLE STEPS & BENCH




ABOVE GROUND INSTALLATION

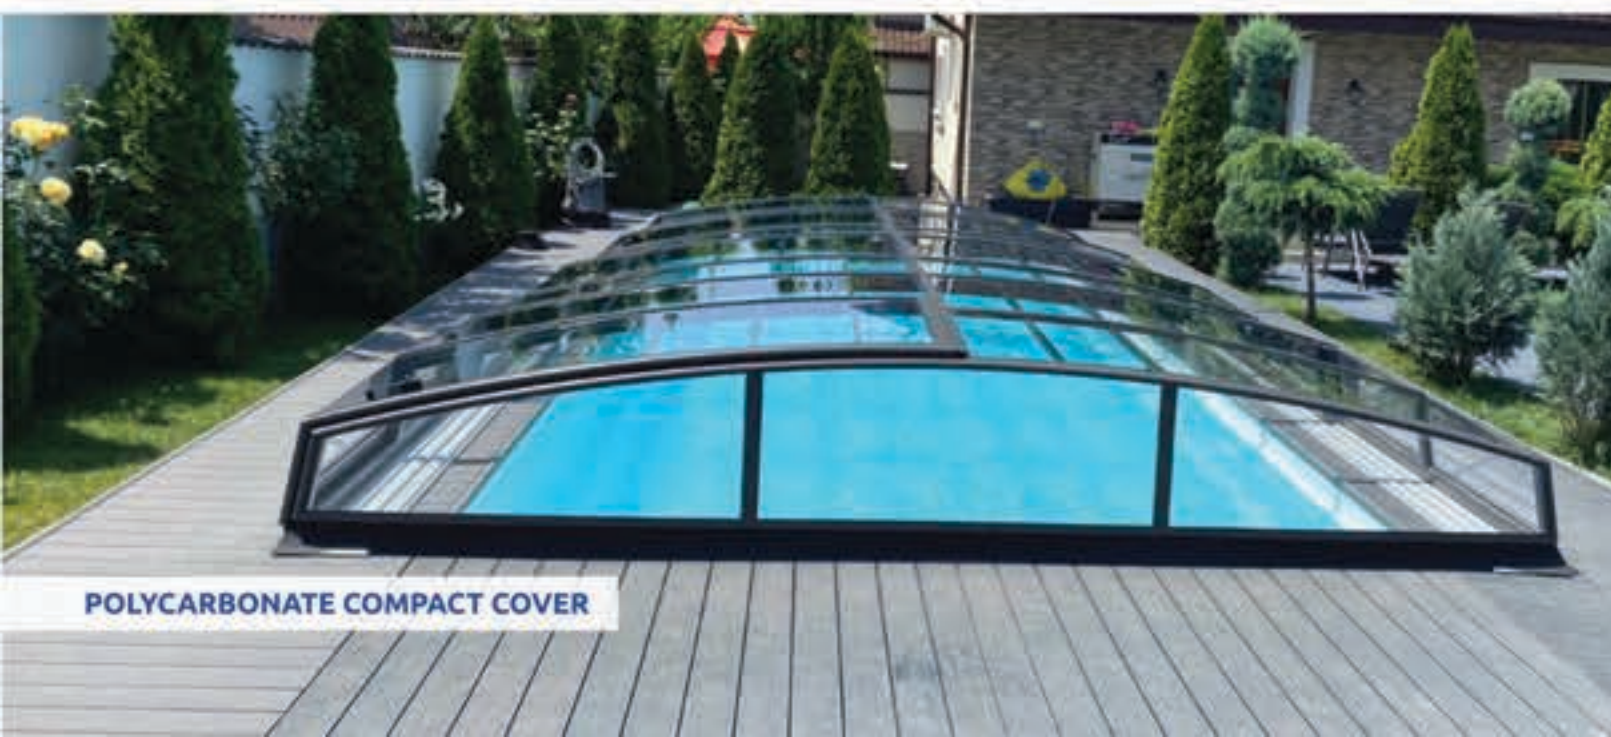


POLYCARBONATE COMPACT COVER

LOGISTICS

My Pool Direct has also the logistic solution, delivering by land with our own trucks and specialized trailers down to the island of Crete and up to the Polar Circle, but also on flat racks on ships to Israel and Emirates.

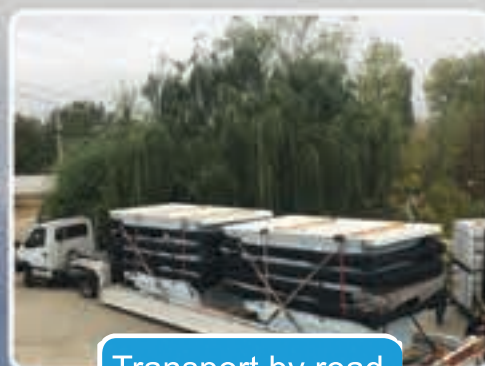

Transport by road

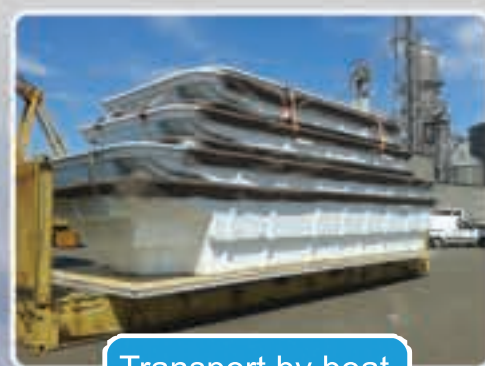

Transport by boat



Transport by helicopter



Reflections range,
plain and metallic finish options




7 DOWNHAM ROAD,
RAMSDEN HEATH,
BILLERICAY,
ESSEX,
CM11 1PU
0044 (0)1268 710425
E-mail: sales@mypooldirect.co.uk
Web : www.mypooldirect.co.uk






Swimming pool GOLF New Model


GOLF 6 X 3.4 X 1.5 R/N/C

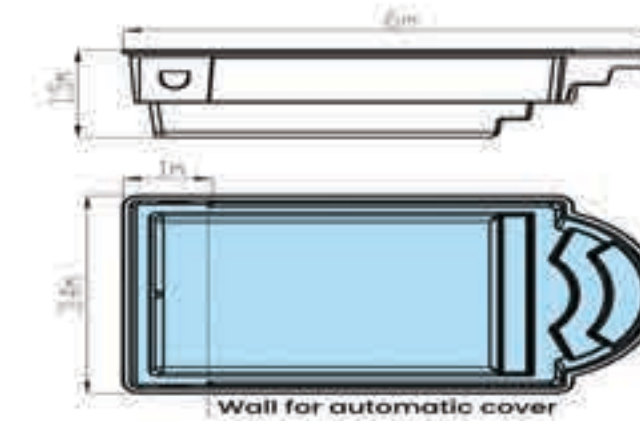


GOLF 7 X 3.4 X 1.5 R/N/C

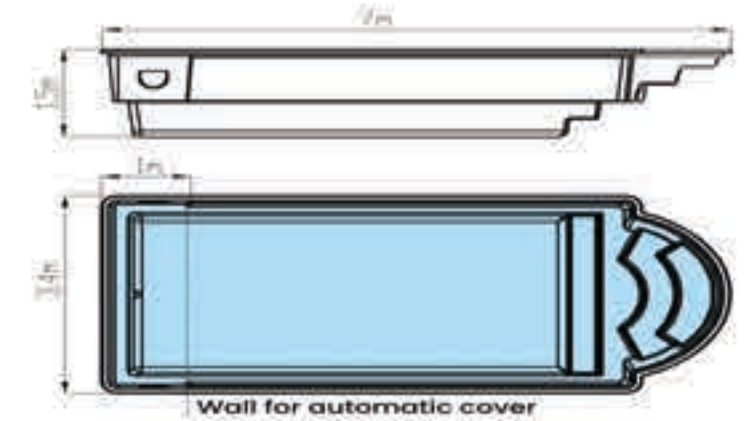


GOLF 8 X 3.6 X 1.5 R/N/C

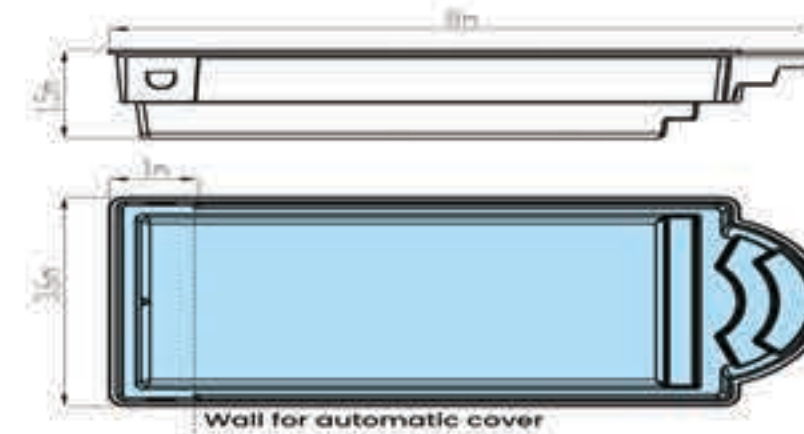


GOLF 8 X 4 X 1.5 R/N/C

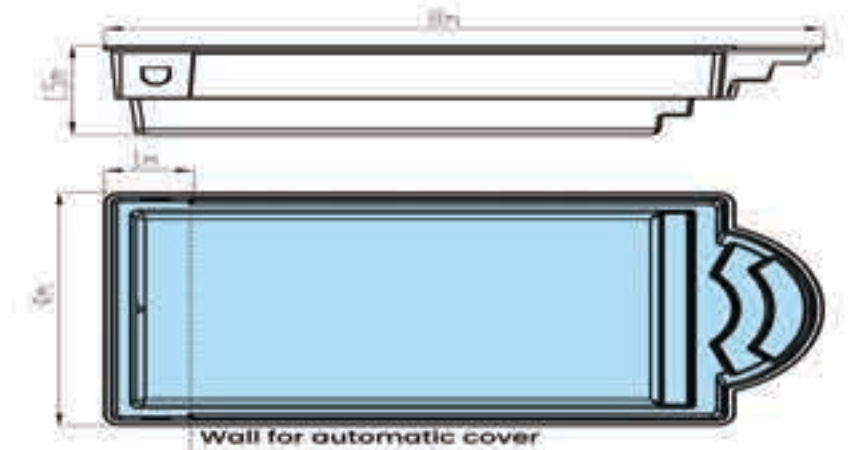

GOLF 9 X 4 X 1.5 R/N/C

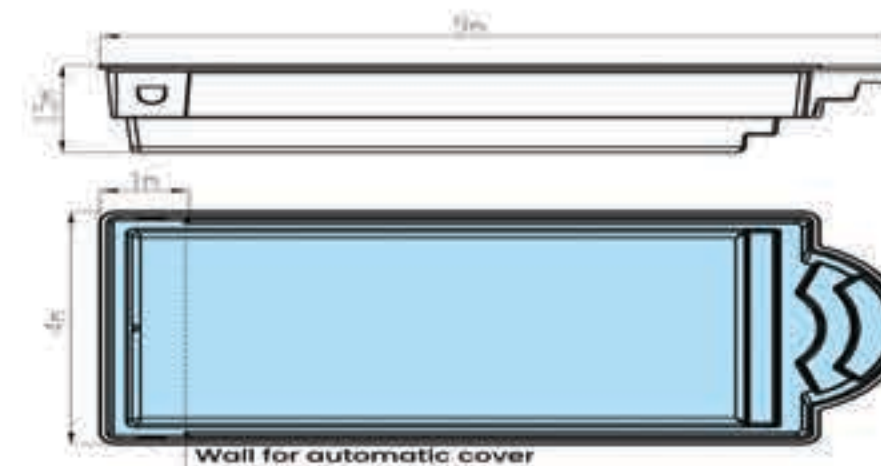


GOLF 10 X 4 X 1.5 R/N/C

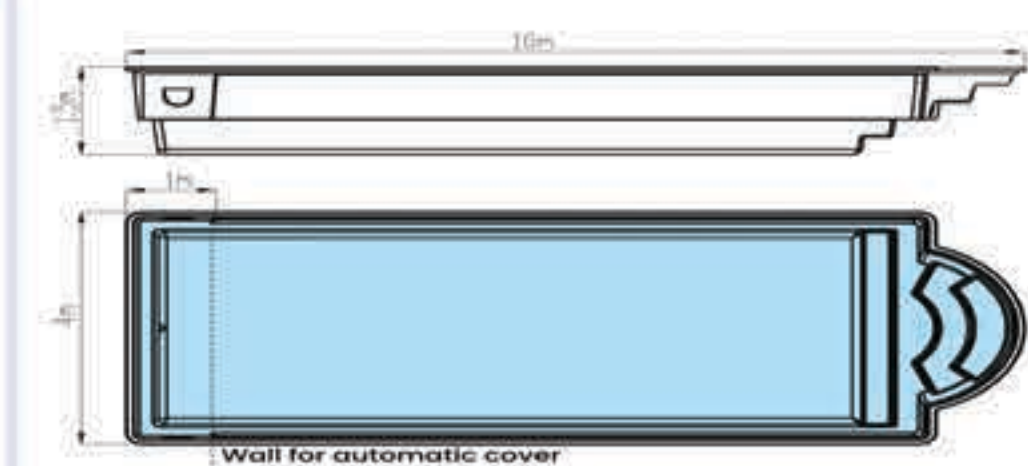




Swimming pool DELTA New Model


DELTA 5.5 X 3 X 1.5 R/N/C

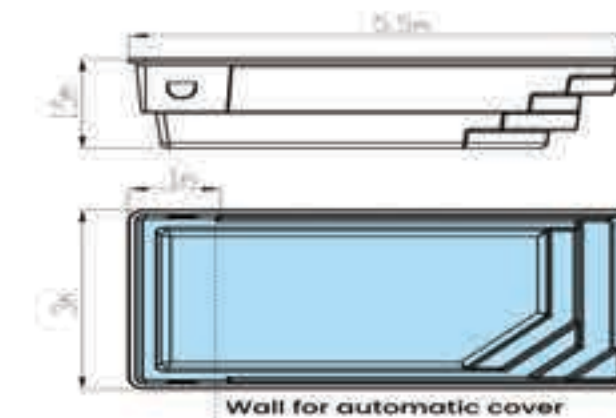


DELTA 6.5 X 3.2 X 1.5 R/N/C

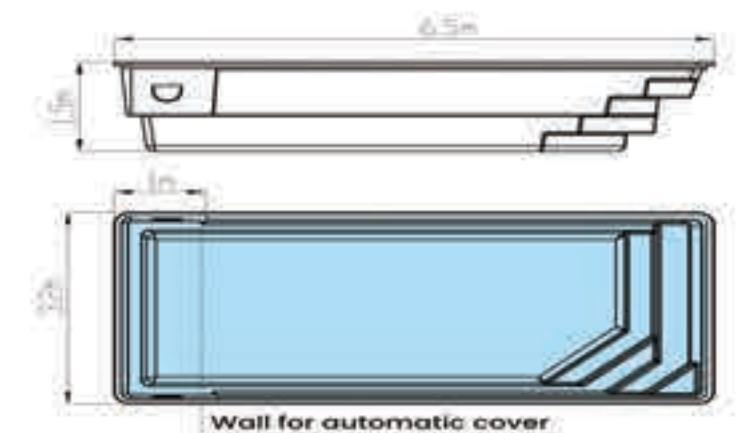


DELTA 7.5 X 3.4 X 1.5 R/N/C

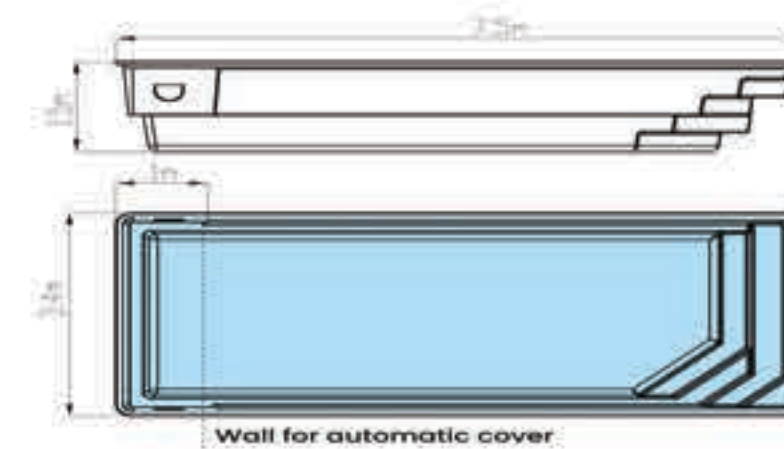



DELTA 8.5 X 3.6 X 1.5 R/N/C

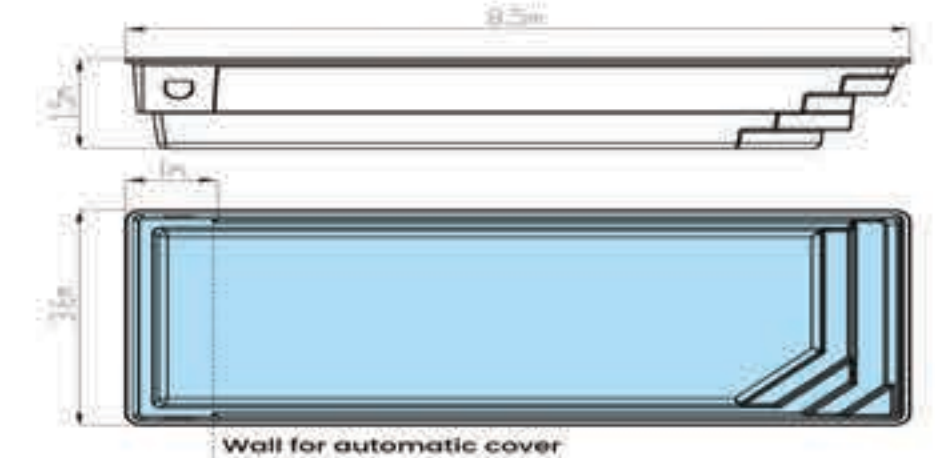


DELTA 9.5 X 3.8 X 1.5 R/N/C

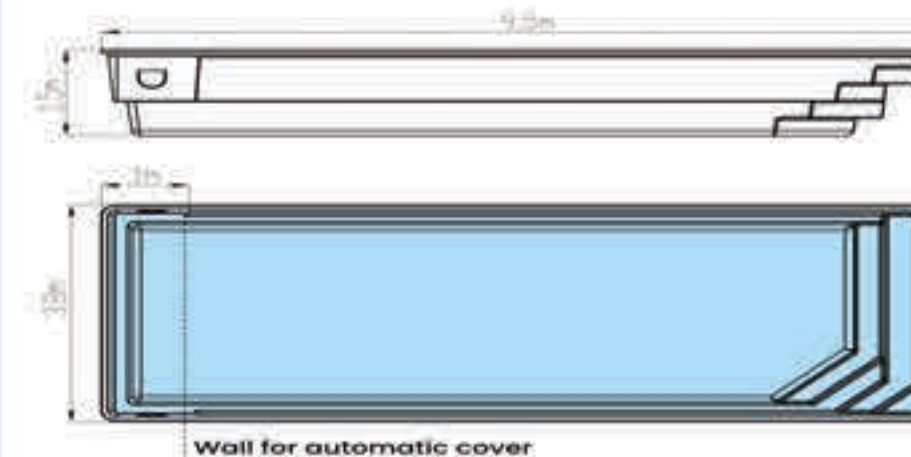


DELTA 10 X 4 X 1.5 R/N/C

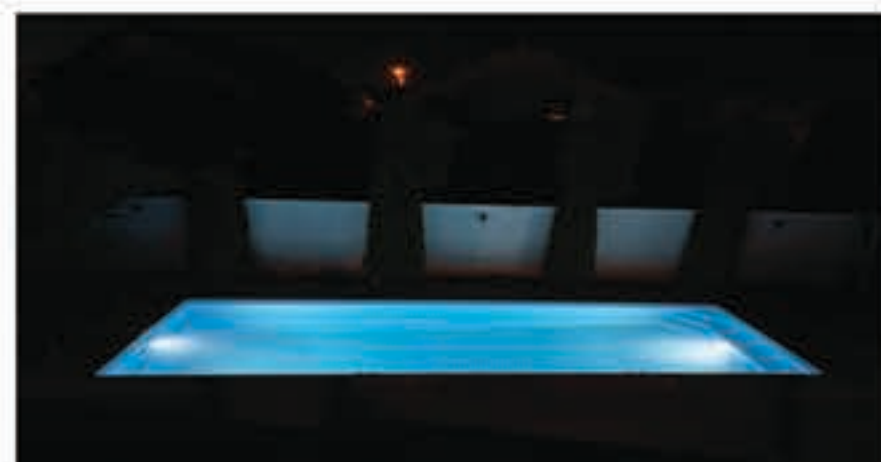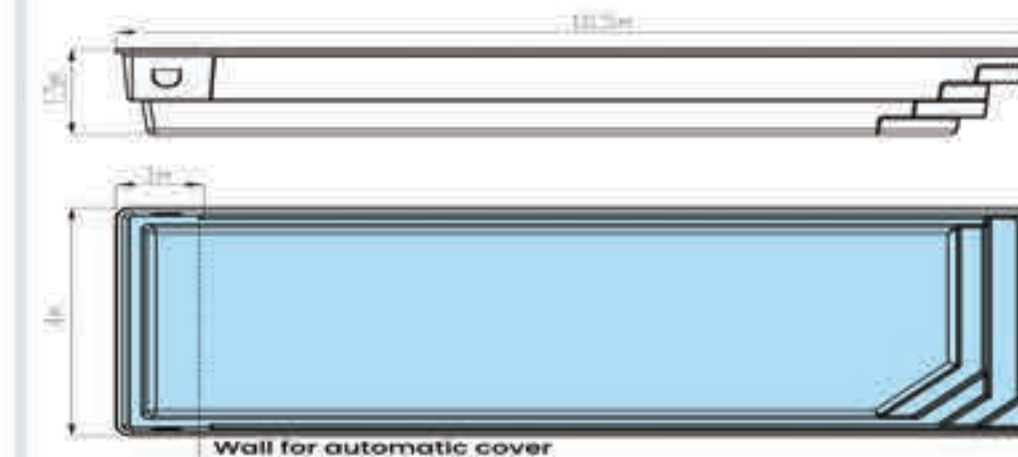

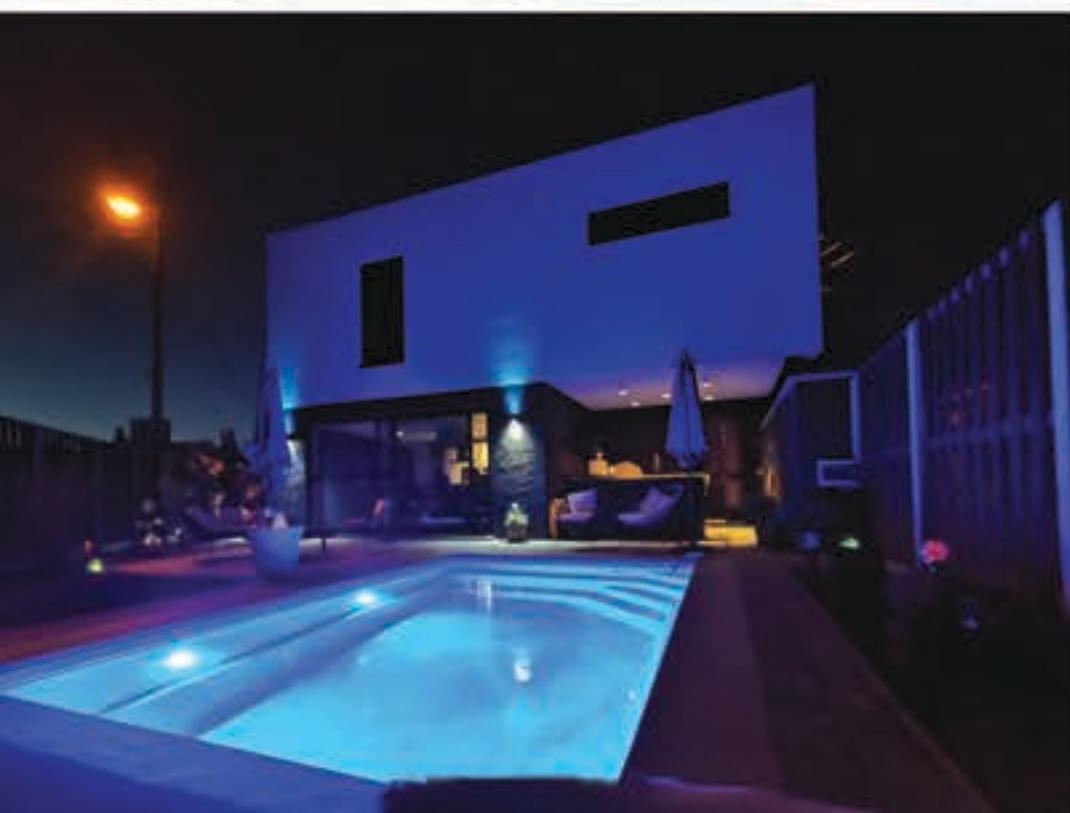


Swimming pool MARINA New Model


MARINA 6 X 3.2 X 1.1 - 1.6 R/N/C

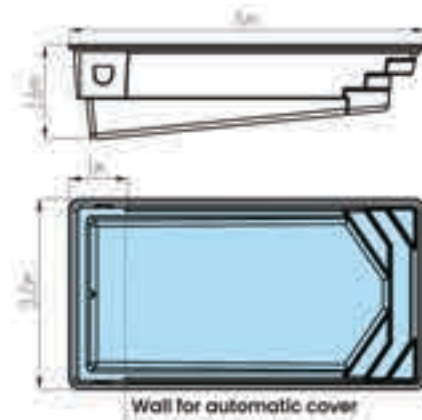


MARINA 8 X 3.6 X 1.1 - 1.8 R/N/C

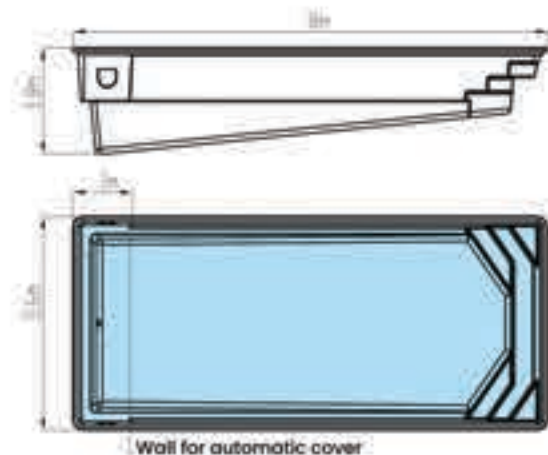


MARINA 9 X 4 X 1.1 - 1.9 R/N/C

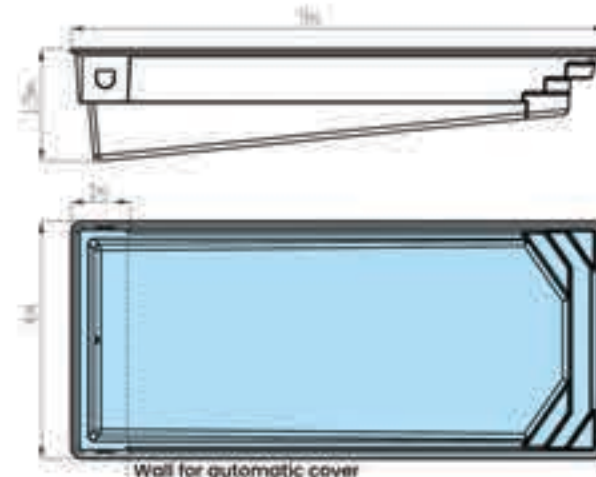


MARINA 7 X 3.4 X 1.1 - 1.7 R/N/C

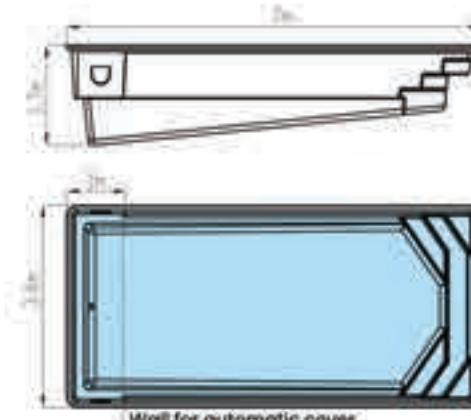

MARINA 8X 4 X 1.1 - 1.8 R/N/C

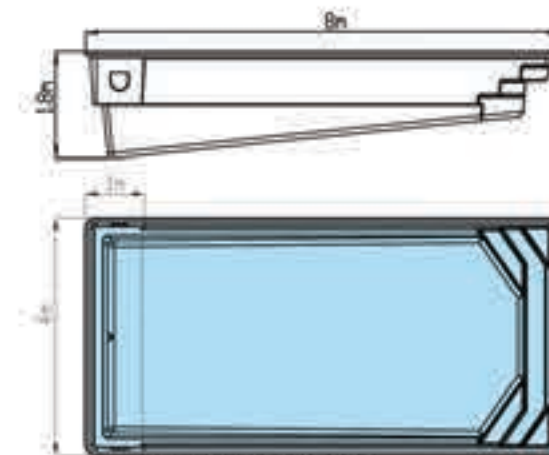

MARINA 10 X 4 X 1.1 - 2.0 R/N/C

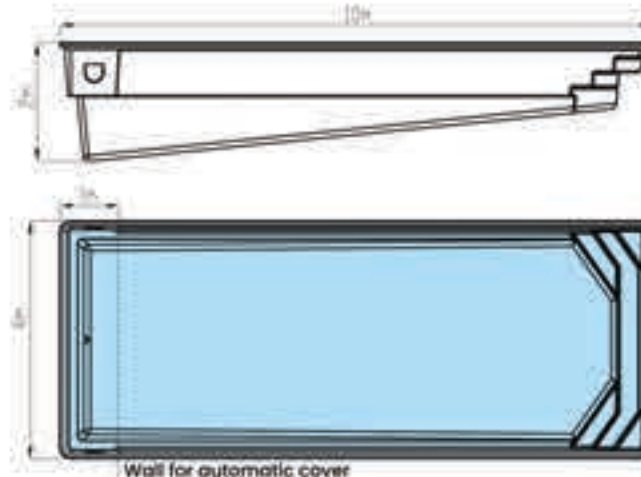

STANDARD COLOUR




3D SPECIAL COLOUR




STRUCTURES


R – standard structure with honeycomb bottom and reinforcements on sides;
H – honeycomb structure on walls, steps & bottom with insulation for Northern countries and not only;
C – ceramic structure for higher rigidity;

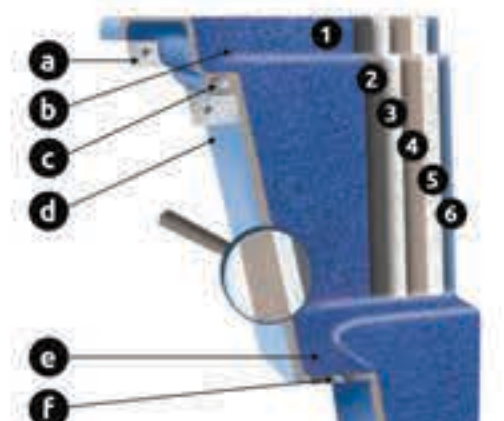

- a. Crane handling reinforcement
- b. Shaped border for automatic cover
- c. Tube shaped reinforcement $\varnothing 43 \times 3$ mm
- d. Metallic reinforcement for anchoring the pool into concrete
- e. Safety step
- f. Metallic reinforcement 2 pieces $50 \times 20 \times 2$ mm

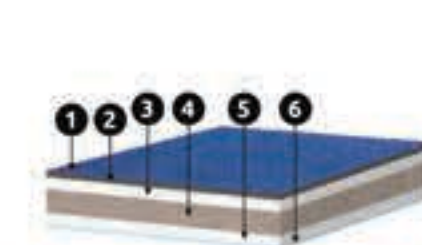

1. 3D DOUBLE ISO NPG GELCOAT layer offers an excellent protection of the color against the chemical agents and high UV resistance ($0.8 - 1 \text{ kg/m}^2$)
2. Antismosis layer with vinyl ester resin reinforced with fiberglass mat (1 mm thickness)
3. Successive layers of orthophthalic resin reinforced with glass fiber mat (2 mm thickness)
4. Honeycomb structure (15 mm thickness, density 80 Kg/m³)
5. Successive layers of orthophthalic resin reinforced with glass fiber mat (2 mm thickness)
6. Top coat for the protection against external factors - moisture (0.3 kg/m^2)

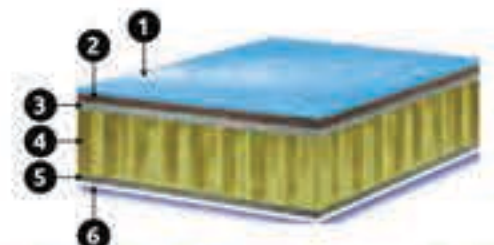

1. Double layer 3D vinyl ester gelcoat-UV and chemically resistant ($0.8 - 1 \text{ kg/m}^2$)
2. Antismosis layer with vinyl ester resin reinforced with fiberglass mat (1 mm thickness)
3. Successive layers of orthophthalic resin reinforced with glass fiber mat (2 mm thickness)
4. Honeycomb structure (15 mm thickness, density 80 Kg/m³)
5. Successive layers of orthophthalic resin reinforced with glass fiber mat (3 mm thickness)
6. Topcoat for protection against external factors - moisture (0.3 kg/m^2)